

06 NOV 2000

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

P-1653-US

U.S. APPLICATION NO. (If known) see 37 CFR 1.55
09/674710

INTERNATIONAL APPLICATION NO.

PCT/IL99/00238

INTERNATIONAL FILING DATE

6 May 1999

PRIORITY DATE CLAIMED

7 May 1998

TITLE OF INVENTION

HANDWRITTEN AND VOICE CONTROL OF VEHICLE COMPONENTS

APPLICANT(S) FOR DO/EO/US


ILAN, Gabriel; GILOH, Benjamin Dov; and KADOSH, Arie

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39.
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: 1) Postcard



097674710

PCT/IL99/00238

529 Rec'd

PCT/PTC 06

NOV 2000

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5):**

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO \$1000.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO \$860.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but
international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY**

\$ 100.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	20 - 20 =	0	X \$18.00
Independent claims	2 - 3 =	0	X \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00

\$

\$

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 100.00

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

TOTAL FEES ENCLOSED =

\$ 100.00

Amount to be
refunded:

\$

charged:

\$ 100.00

- a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 05-0649 in the amount of \$100.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 05-0649. A duplicate copy of this sheet is enclosed.

Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Heidi M. Brun
EITAN, PEARL, LATZER & COHEN-ZEDEK
One Crystal Park, Suite 210
2011 Crystal Drive
Arlington, VA 22202-3709
Tel: (703) 486-0600 Fax: (703) 487-0800

SIGNATURE:

Heidi M. Brun

NAME

34,504

REGISTRATION NUMBER

09/674710

529 Rec'd PCT/PTC 06 NOV 2000

S/N: Unknown

PATENT
P-1653-US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Ilan, et al. Examiner: Unknown
Serial No.: Unknown Group Art Unit: Unknown
Filed: Concurrently
Title: HANDWRITTEN AND VOICE CONTROL OF VEHICLE
COMPONENTS

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Please amend the Patent application before examination, as follows:

In the Specification:

On page 5, line 4, please delete "22".

On page 10, line 17, please delete "Operation".

On page 10, line 18, please replace "Mode" with --Operation Mode--.

On page 12, line 8, delete "Appliance Examples".

On page 12, between line 8 and line 9, please add a new header line --Appliance

Examples--.

In the Claims:

Please add the following claims (21 - 24):

APPLICANTS: Ilan et al.
SERIAL NO.: Unknown
FILED: Concurrently
Page 2

21. The apparatus of claim 7 wherein said at least one appliance is a cellular telephone and said command data set includes short text messages.

22. The apparatus of claim 7 wherein said at least one appliance is a personal computer and said command data set includes short text messages.

23. The apparatus of claim 7 wherein said appliance is a radio.

24. The apparatus of claim 7 wherein said at least one appliance is a navigation system and said command data set includes locations.

[illegible]

Eitan, Pearl, Latzer & Cohen-Zedek
One Crystal Park, Suite 210
2011 Crystal Drive
Arlington, VA 22202-3709, U.S.A.
Telephone No.: (703) 486-0600
Facsimile No.: (703) 486-0800

3/PRTS

09/674710

529 Rec'd PCT/PTC 06 NOV 2000

HANDWRITTEN AND VOICE CONTROL OF VEHICLE COMPONENTS

FIELD OF THE INVENTION

The present invention relates to handwriting and voice recognition systems in general, and more particularly to handwriting and voice recognition systems for use in a vehicle.

BACKGROUND OF THE INVENTION

Voice recognition systems have been utilized in a variety of applications to command electronic devices. Recent attempts have been made to employ such voice recognition systems to allow drivers to control automobile appliances, such as vehicle-based cellular telephones or electrical windows. Such applications make it possible for drivers to keep their eyes on the road instead of on the appliances while driving, thereby enabling drivers to drive more safely. However, such systems are adversely affected by the ambient noise present in environments such as the interior of a vehicle, particularly when the windows are open while driving at high speeds. Thus, the need exists for vehicle appliance control that allows a driver to keep his eyes on the road while not being affected by ambient vehicle noise.

SUMMARY OF THE INVENTION

It is an object of the present invention that a driver may operate automobile appliances safely while driving. A system is provided whereby the driver's eyes need not leave the road, and the driver's hands need not leave the steering wheel or gearshift, when operating an automobile appliance.

It is a further object of the present invention to simplify the operation of vehicle appliances using an improved command recognition system.

It is yet another object of the present invention to provide a command recognition system capable of use in noisy environments.

5 It is another object of the present invention to simplify command recognition operation when used by different users.

It is an advantage of the present invention to combine handwriting and voice recognition to eliminate the need for speaker independent voice recognition technology which today is hard to implement in a noisy environment

10 It is an additional advantage of the present invention that handwriting recognition for providing commands is not influenced by the automobile's noisy environment

It is yet another advantage of the present invention to provide command recognition operation independent of noise generated by other persons in the vehicle.

15 It is a feature of the present invention that devices may be operated by both voice and handwriting commands to increase the available instruction set for sophisticated appliances such as personal computers or cellular telephones when sending short text messages.

20 It is an additional feature of the present invention to offer combined handwriting and speaker dependent recognition in order to achieve high recognition credibility desirable for work in a vehicle environment.

It is an additional feature of the present invention that double validation of a user identity is employed using both the voice print and the signature characteristics of the user.

The present invention is embodied in an improved user interface device for controlling at least one appliance within a vehicle comprising a command recognition module having a command data set. The command recognition module is adapted to receive handwriting and voice signals, to associate said handwriting and voice signals with the command data set such that at least one command is used by said at least one appliance. The command recognition module is further adapted to generate a command signal sequence upon associating at least one of the handwriting and/or voice signals with the at least one command. A main module operatively connects to the command recognition module and operates to relay the command signal to the at least one appliance. An appliance interface connects between the at least one appliance and the main module and is adapted to relay the command signal to the appliance.

The command recognition module further includes a microphone and a voice recognizer operatively connected to the microphone to receive voice signals and to generate a command signal upon associating at least one of the voice signals with the at least one command. Furthermore, a touchpad and a handwriting recognizer operatively connected to said touchpad is included to receive handwritten signals and to generate a command signal upon associating at least one of said handwritten signals with said at least one command. Handwritten signals may include handwritten characters, words, numbers, scribbles, or any gesture that a user can perform with his hands or fingers, including three dimensional gestures, thus the touchpad can be replaced by any kind of hand-or-finger responsive input device like a joystick, a three dimensional mouse, etc., or any other known body-part-responsive input device adaptable to a human communication method, such as a head movement. A speaker is connected to either the command recognition or the main module to give feedback to the driver. The feedback

may be in the form of a playback of the recognized command before its execution and/or talking menus using recorded speech or synthetic speech such as known text-to-speech (TTS) technology. A transparent display mounted on the front window may also be used to generate a visual feedback. Alternatively, after a character or digit is entered and/or

5 after an entry sequence is completed (e.g., word, telephone number) the entry may be played back or displayed. Other features and advantages of this invention will be made apparent upon review of the drawings and detailed description of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the appended drawings in which:

Figs. 1 and 2 are functional block diagrams of a voice and handwriting recognition system constructed and operative in accordance with a preferred embodiment of the present invention; and

15

Fig. 3 is a functional block diagram of a dual validation mode voice and handwriting recognition system constructed and operative in accordance with a preferred embodiment of the present invention.

20 DETAILED DESCRIPTION OF THE PRESENT INVENTION

With reference to the drawings for purposes of illustration, the present invention is embodied in a command recognition device 20 (Fig. 1) that enables the operation of electronic appliances in a vehicle or the like, represented conceptually by a steering wheel 18, by using handwritten commands through the use of handwriting recognition

technology known in the art. Known voice recognition technology may additionally be combined with handwriting recognition technology to provide a reliable and robust method of interacting with such electronic appliances, systems or devices. Electronic appliances 22 may include, but are not limited to, a cellular telephone 24, a Global
5 Positioning System (GPS) navigation system 26, a personal computer (PC) 28, a radio 30, an alarm system 32, electric windows (not shown), a sunroof (not shown), and the like.

With reference to Fig. 2, appliances 22 connect to the device 20 through an appliance interface 34. The appliance interface 34 is preferably adapted for use with one
10 or more appliances or types of appliances and may be adapted to conform with appliance hardware standards and/or software protocols for remote operation thereof. The interface module 34, implemented in hardware and/or software, is the physical module with which appliances connect via electrical connectors 36. Interface 34 is controlled by a main program module 35 which selects the commands to be sent to each appliance. Interface
15 module 34 also produces the correct voltage and current needed to communicate with the appliances. For example, if the user wishes to communicate with a PC via the RS232 protocol, then translation of digital commands produced by the main program module 35 into actual +/-12 volt pulses (as required by the RS232 protocol) will be performed by the interface module 34. Command sets corresponding to each of the appliances is
20 maintained by the main program module 35. An example of such interface adaptability is found in conventional universal remote control devices for use with entertainment systems where the remote control device may be trained by the user to cooperate with appliances and/or includes a library of known appliances and specific commands corresponding to such appliances. In the latter instance the user selects the library of

commands that corresponds to the appliances. The connection leads 36 between the appliance and the interface may vary and include, but are not limited to, wire, infrared, serial, or bus connections. In an alternative embodiment, the appliances may be assembled with the interface module 34 and may include any number of conventional interface configurations.

Device 20 preferably includes a voice recognizer 38 connected to a microphone 42 and a handwriting recognizer 44 connected to writing pad 46. Command recognition as used herein refers to handwritten or spoken command signals being recognized by a handwriting or voice recognizer engine and then matched with preprogrammed commands contained in a command data set which are associated with the command signal.

The voice recognizer 38 receives voice commands through the microphone 42 and searches for a matching voice command within a known list of voice commands tailored for the appliances to which device 20 is connected. The microphone may be placed in a vehicle console, sun visor, or in any location suitable for the convenient reception of voice commands from the driver or other passengers. Voice commands may also be input via an external microphone, such as via a cellular phone, or otherwise into the voice recognizer such as is described in assignee's copending U.S. Patent Application No. 09/002,616, the disclosure of which is incorporated herein by reference. It will be appreciated that such voice commands may be trained by the user and/or provided in a pre-trained library of appliance brand specific commands.

The handwriting recognizer 44 receives symbols provided by the user through handwriting pad 46. The handwriting pad 46 is preferably located in a position convenient for the driver such as on the steering wheel or on the gearshift. Alternatively,

handwriting commands may be input via an external touchpad, such as a laptop's touchpad connected to device 20. A handwriting recognizer of the type suitable for this purpose is disclosed in U.S. Patent Nos. 5,659,633 and 5,774,582 and U.S. Patent Application Nos. 08/528293, 08/418530, 08/282187, and 08/878741, the disclosures of which are incorporated herein by reference. It will be appreciated that handwritten symbols corresponding to appliance commands may be trained by the user and/or provided in a pre-trained library of application specific commands.

It will be appreciated by those skilled in the art that the command libraries for the command recognition module may include a standard set of commands adapted for use with appliances such as cellular phones or personal computers, such as commands relating to voice dialing, number dialing, getting e-mail, operating an alarm system, and the like.

Main program module 35 provides an interface to control the transfer and distribution of commands between the appliance interface 34 and the recognition modules 38 and 44. The device 20 preferably draws power from the car's voltage 50 through a direct connection, being connected to the lighter outlet or directly to the car battery. Device 20 may alternatively operate independently on DC batteries.

A switch 52 is included to permit switching of the device between an operational mode and a set-up/training mode. A function of the main program module 35 is to combine and coordinate the recognition modules 38 and 44 in order to produce the proper command to the chosen appliance. The first command after entering the recognition or operation mode should be related to identifying the appliance which the user wishes to control. Alternatively, a default appliance or the last appliance used before system shutdown may be used. Following appliance selection, the main program

module 35 will switch to the chosen appliance, sending commands recognized by the voice recognizer 38 and/or the handwriting recognizer 44 to that specific appliance. It is the role of the main program module 35 to associate the recognized command given by the user and the proper appliance command for the appliance selected.

- 5 The voice and handwriting recognizers 38 and 44 search for a matching voice or handwriting command in a library of commands. There are preferably separate libraries for every appliance. Once an appliance is selected, the main program module 35 instructs the recognizers to load the proper command libraries, typically one for voice and one for handwriting. Alternatively, some libraries are loaded and the recognizers are notified which libraries should be used during the search for a matching command.
- 10 Subsequently, upon receiving an input signal, the recognizers send an identifier of the appliance command that was recognized to the main program module 35. Given this identifier and the appliance that has been selected, the main module will interpret the command and send it to the selected appliance via the appliance interface 34. To enable
- 15 global commands, such as pick up the cellular phone, there are also voice/handwriting signals that will be recognizable no matter what appliance has been currently selected. Representations of these signals will be loaded in every library for use by the recognizers, or in a global library, and will have unique identifiers that will not be used by any other appliance so that the main program module 35 will always be able to
- 20 interpret them. Furthermore, a "double validation mode" is provided where the main program module 35 validates that both recognizers returned identifiers corresponding to the same command, otherwise the command will be rejected. In order to increase the effectiveness of the system in the presence of noise, a tolerance level may be set. For example, the voice recognizer 38 could return the identifiers of several best matches

instead of just one identifier. Should one of the identifiers correspond to an identifier returned from the handwriting recognizer 44, this may be deemed an acceptable validation. Additionally, a "conforming mode" is also provided in order to allow two commands to be entered simultaneously. For example, when the user says "radio" and writes "5" the device will turn on the radio and select station 5 immediately. Furthermore, a "user verification/authentication mode" is provided based on a combination of the user's voice and handwriting characteristics rather than the known user verification modes that operate on these characteristics separately. The user may receive feedback from device 20 through loudspeaker 40 indicating the recognized command was received and sent to the appliance.

It is appreciated that the same handwriting gesture or spoken command may have a different meaning when being interpreted by the main program module 35 depending on the appliance selected. For example, the spoken word "up" might mean "close window" if "electric windows" have been selected, but it might also mean "increase the volume" when operating the radio. It is further appreciated that a handwriting gesture or spoken command may operate more than one appliance at a time, thus providing a "macro" capability where one spoken/handwritten gesture is associated with a series of commands. For example, a user might say "Jill's settings," whereupon device 20 adjusts the seats, mirrors, and steering wheel, and turns on the radio and tunes in Jill's favorite station.

The appliance interface 34, command recognition modules 38 and 44, and main program module 35 may operate on any conventional hardware platform having a CPU and memory adequate to carry out the recognition functions in real time and capable of storing the command libraries. Programming logic may be stored in any type of

non-volatile memory, for example, on memory chips such as flash memory or EPROMs. Optionally, command libraries may be included on removable memory modules (not shown) allowing for user training to occur on a conventional PC or to provide appliance specific libraries tailored to specialized needs. The libraries may also be loaded from a

5 PC to device 20 using communication protocols such as RS232. A CPU and memory configuration of the type for this purpose includes the H8/3040 microcontroller, commercially available from Hitachi, and AMD29F800 Flash memory, commercially available from Advanced Micro Devices.

10 In a preferred embodiment, the device 20 has two major operation modes, namely, recognition and training modes. Switching between operation mode and training mode is controlled by the switch 52. The method for switching between modes using the switch may vary. For example, if the user wishes to enter recognition mode, he may press the switch once to enter operation mode, enabling device 20 to accept spoken or written commands. If the user wishes to train the device 20 for a new command, he may rapidly

15 press the switch twice so that the main program may switch to training mode. Other global commands may be associated with the switch such as for ending a conversation via cellular phone or for closing an application window on the computer. Operation Mode

Device 20 in operation mode receives voice commands through a microphone 42.

20 The microphone 42 receives the human voice and transforms it into an electrical signal. This signal is then amplified and digitized by the voice recognizer 38. After digitization, the voice recognizer 38 utilizes processing software in order to process the voice signal and perform recognition by searching for a matching voice command in a library which resides in memory. Following association of the voice signal with a command from the

library, the voice recognizer 38 sends the command identifier to the main program software module 35 which then interprets it according to the current input state of device 20 (e.g., appliance has been selected, waiting for appliance command input) and sends the command sequence to the proper appliance(s). The speaker 40 may be used by the recognition modules 38 and 44 or by the main program module 35 to optionally convert the command signal into a computer generated voice signal or other playback signal to provide the user with feedback as an indication that the voice signal was received and properly understood.

Handwritten commands are received through writing pad 46, such as a touchpad, that when touched at a certain point transmits the touch point's X and Y coordinates. In the case of a touchpad, the input may be provided with a finger. The handwriting recognizer 44 receives the character, gesture, or word written on the touchpad and searches for a handwriting command match in a library of pre-trained characters, gestures, and words. Once the handwriting recognizer 44 has found a match, it signals the main program module 35. Preferably, the handwriting recognition library includes pre-trained alphanumeric characters, gestures, and symbols so the user does not have to train the recognizer to recognize them. However, the user may have the option of generating symbols convenient to the user for association with appliance commands.

Training Mode

Training each recognizer 38 and 44 means associating a spoken command or a written symbol\gesture\word\character with a command or command sequence that is understood by at least one of the appliances by programming such a relationship into the device 20. For example, the gesture "arrow up" could mean "close the window, " or the uttering a name could activate the cellular phone to dial that person's telephone number.

The communication protocols of the appliances used in the present invention are typically pre-programmed with device 20. Where a personal computer or other easily adaptable computing device is used, software within the PC may be provided to communicate with the present invention. In such instances the number of possible
5 commands depend upon the type of software and operations used by the user. In order to associate a command with an operation, the user might program the commands as part of the training process. Where operating appliances such as an alarm or a window, device 20 must possess the actual signals that operates those appliances. Appliance Examples

A typical example of the operation of the present invention may be seen with
10 respect to a radio in which the command set library for the radio was pre-trained into device 20 or entered by the user during training mode. After selecting recognition mode, the user says the word "radio". The main program module 35 now routes all the recognized commands to the radio. The user then writes or says the number "5." The main program then translates the recognized "5" to a digital command understood by the
15 radio as "jump to station number 5" and sends it via interface 34 to the radio. Feedback may be provided for every operation performed by the user. For example, when the user says "radio" the loudspeaker says "radio is activated" using TTS technology. When the user writes "5" the loudspeaker says "station 5 selected" and optionally the name of the station, if available.

20 When activating or deactivating a vehicle alarm system, the user may train device 20 to learn both spoken and handwritten passwords, signatures, and other user-specific signal characteristics as can be seen with additional reference to Fig. 3. Only after recognizing both passwords will the main program module 35 send a command to activate or deactivate the alarm system. Another related application provides for

appliances such as the seat and mirrors to be adjusted according to the user identification using personalized command and settings libraries, thus accommodating any one of several drivers of the same car.

When operating a car navigation system, the user may navigate the system's menus
5 by voice and then enter names of streets by writing them on the touchpad.

While the present invention has been described with reference to a few specific embodiments, the description is intended to be illustrative of the invention as a whole and is not to be construed as limiting the invention to the embodiments shown. It is appreciated that various modifications may occur to those skilled in the art that, while
10 not specifically shown herein, are nevertheless within the true spirit and scope of the invention.

CLAIMS

What is claimed is:

1. Apparatus for controlling at least one appliance within a vehicle, said device comprising:

5 a command recognition module having a command data set and adapted to:
receive a handwritten signal,
associate said handwritten signal with at least one command in said command data set for controlling said at least one appliance, and
communicate a command signal associated with said command to said appliance.

10

2. The apparatus of claim 1 wherein said command recognition module includes a microphone and a voice recognizer operatively connected to said microphone to:

receive a voice signal, and

15 associate said voice signal with said at least one command in said command data set for controlling said at least one appliance.

3. The apparatus of claim 1 wherein said command recognition module includes a touchpad and a handwriting recognizer operatively connected to said touchpad to receive said handwritten signal.

20

4. The apparatus of claim 1 wherein said command recognition module includes:
a microphone and a voice recognizer operatively connected to said microphone to:
receive a voice signal, and

associate said voice signal with said at least one command in said command data set for controlling said at least one appliance; and

a touchpad and a handwriting recognizer operatively connected to said touchpad to receive said handwritten signal.

5

5. The apparatus of claim 1 including:

said command data set having a plurality of commands; and

a main module operatively connected to said command recognition module and operative to communicate said command signal to said at least one appliance.

10

6. The apparatus of claim 5 including:

an appliance interface connected between said at least one appliance and said main module and adapted to communicate said command signal to said appliance.

15

7. The apparatus of claim 6 including:

a microphone and a voice recognizer operatively connected to said microphone to: receive a voice signal, and

associate said voice signal with said at least one command in said command data set for controlling said at least one appliance; and

20

a touchpad and a handwriting recognizer operatively connected to said touchpad to receive said handwritten signal.

8. The apparatus of claim 7 wherein said command data set includes alphanumeric characters.

9. The apparatus of claim 7 wherein said command data set includes symbolic characters.

5 10. The apparatus of claim 7 wherein said at least one appliance is a cellular telephone and said command data set includes cellular telephone commands and alphanumeric characters.

10 11. The apparatus of claim 7 wherein said at least one appliance is a personal computer and said command data set includes computer instructions and alphanumeric characters.

15 12. The apparatus of claim 7 wherein said command data set is associated with a predetermined set of voice signals.

13. The apparatus of claim 7 wherein said command data set is associated with a predetermined set of handwritten signals.

20 14. The apparatus of claim 7 wherein said command data set is associated with a predetermined set of handwritten and voice signals.

15. The apparatus of claim 7 wherein said command data set is associated by a user with at least one voice signal.


16. The apparatus of claim 7 wherein said command data set is associated by a user with at least one hand signal.

17. The apparatus of claim 7 wherein said command data set is associated with
5 handwritten and voice signals modifiable by said user.

18. The apparatus of claim 7 wherein said appliance is a car alarm.

19. The apparatus of claim 7 wherein said device connects to a plurality of
10 appliances and said main module and appliance interface cooperatively distribute said command signals to said appliances.

20. A method of controlling an appliance within a vehicle comprising the steps of:
providing a command recognition module having a command data set including a
15 touchpad and a handwriting recognizer operatively connected to said touchpad;
receiving handwritten signals;
associating said handwritten signal with at least one command in said command
data set for controlling said at least one appliance, and
communicating a command signal associated with said command to said
20 appliance.

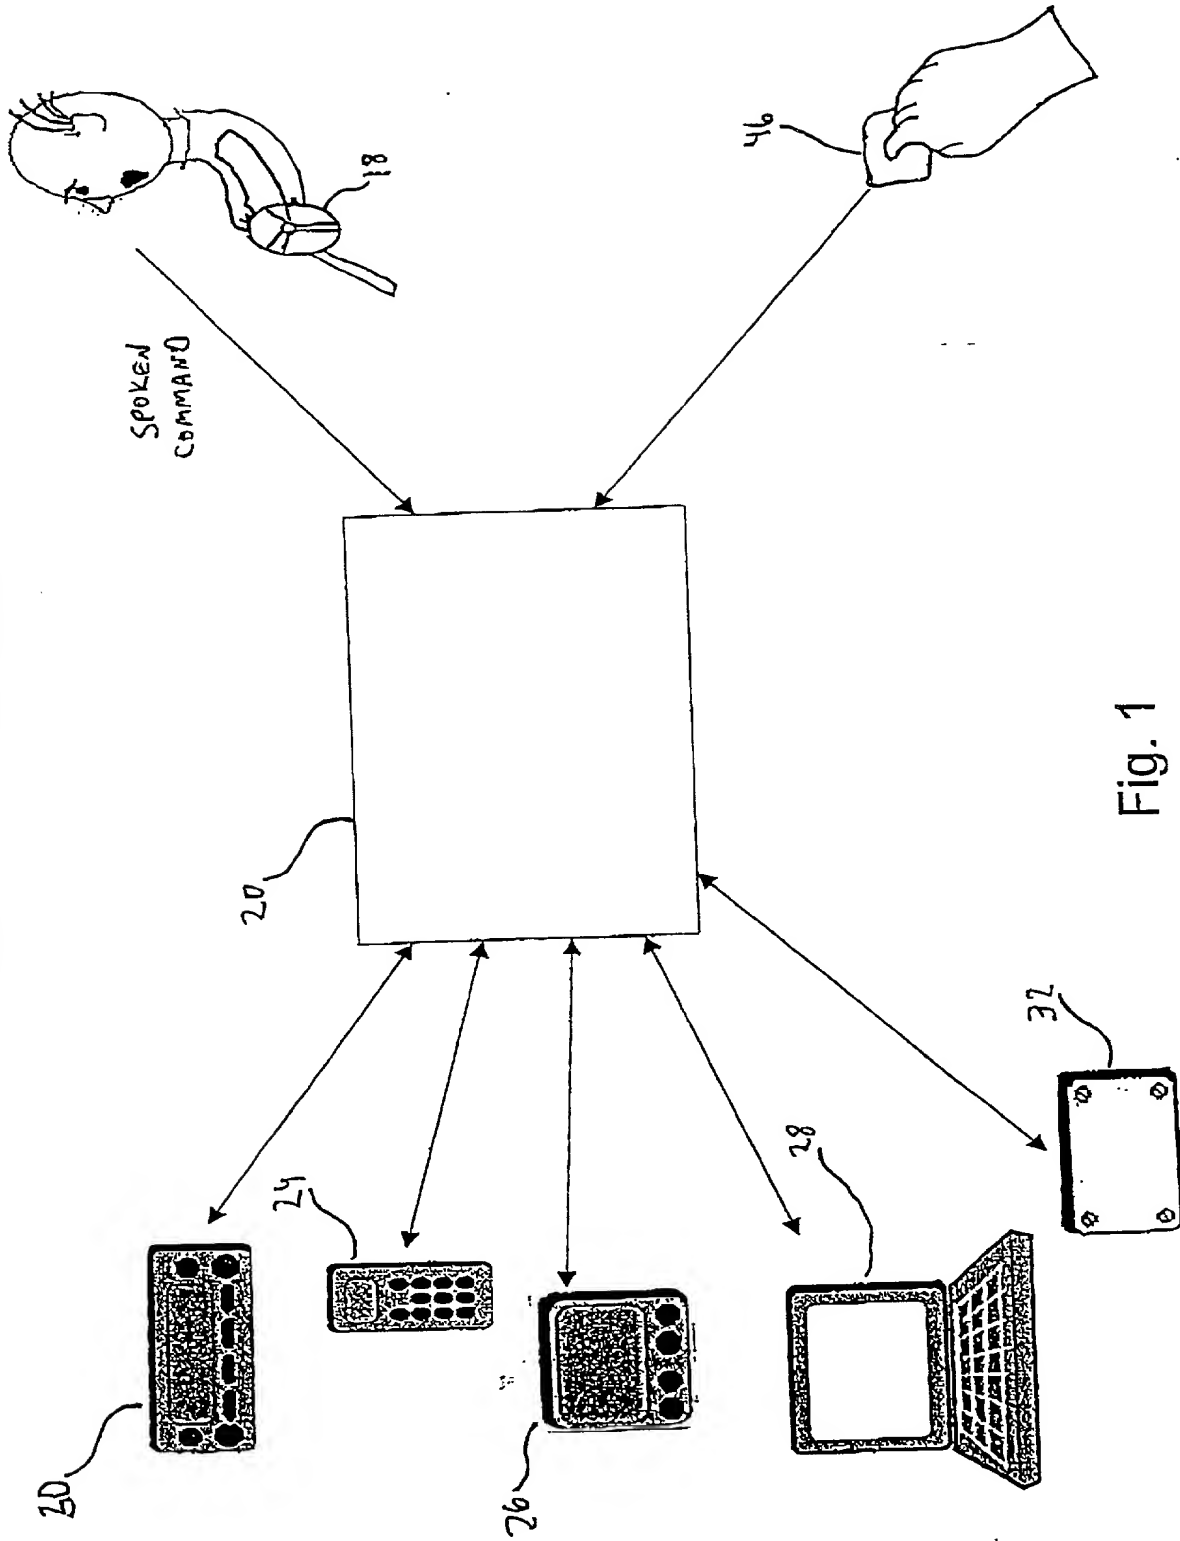

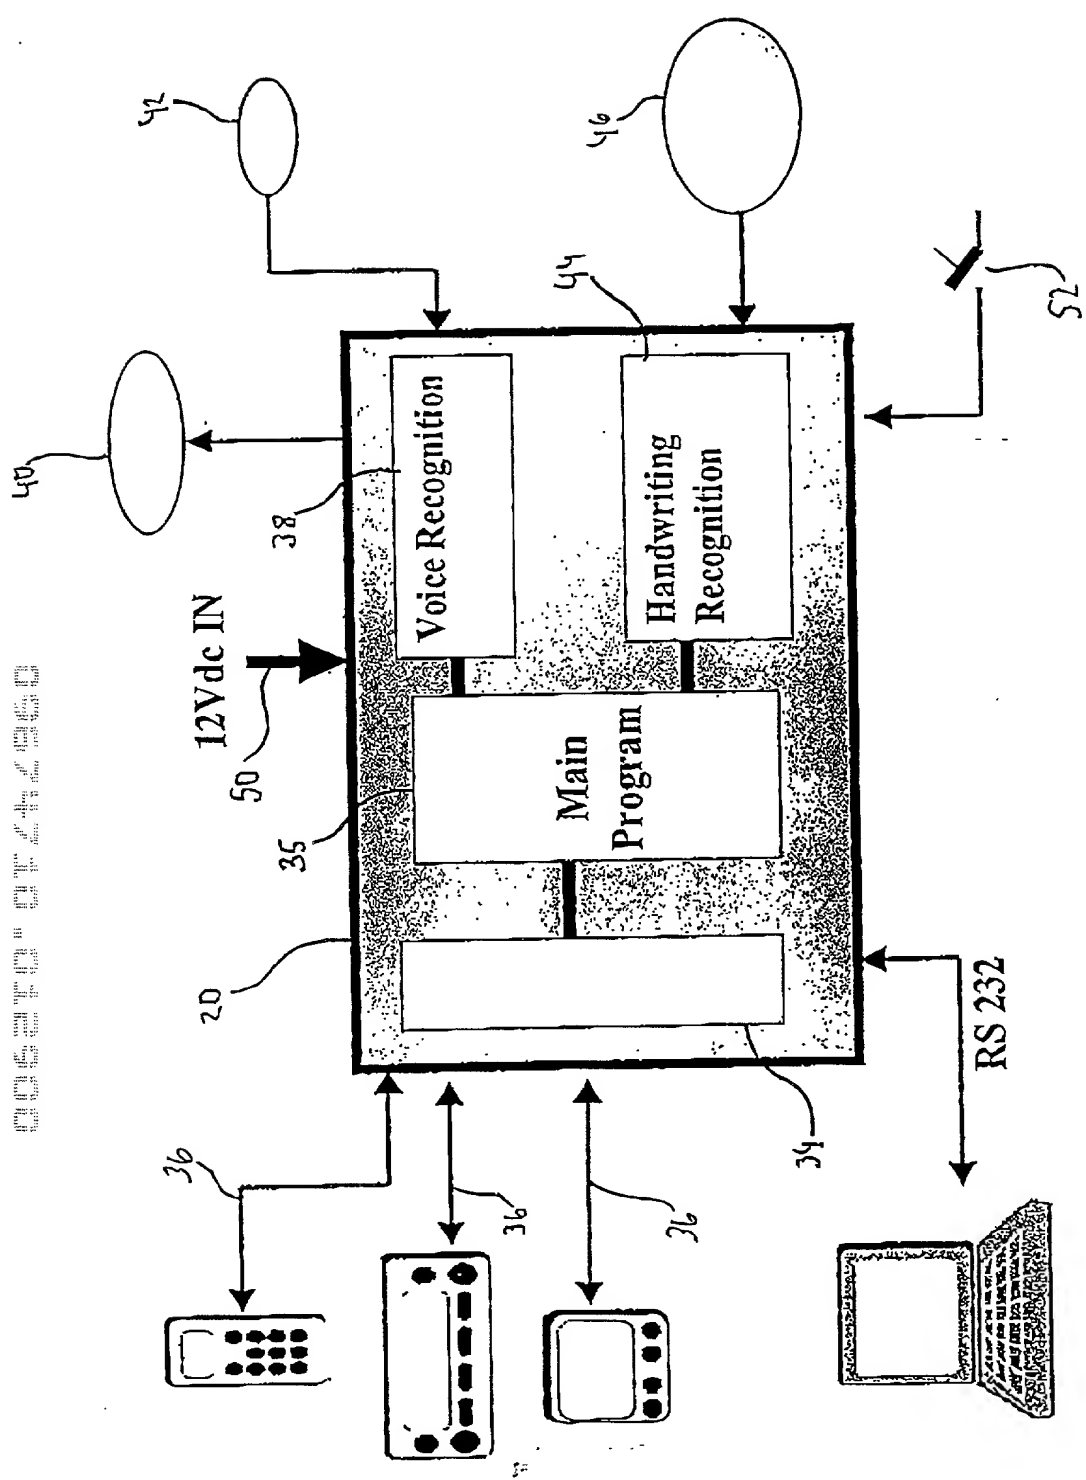


Fig. 2

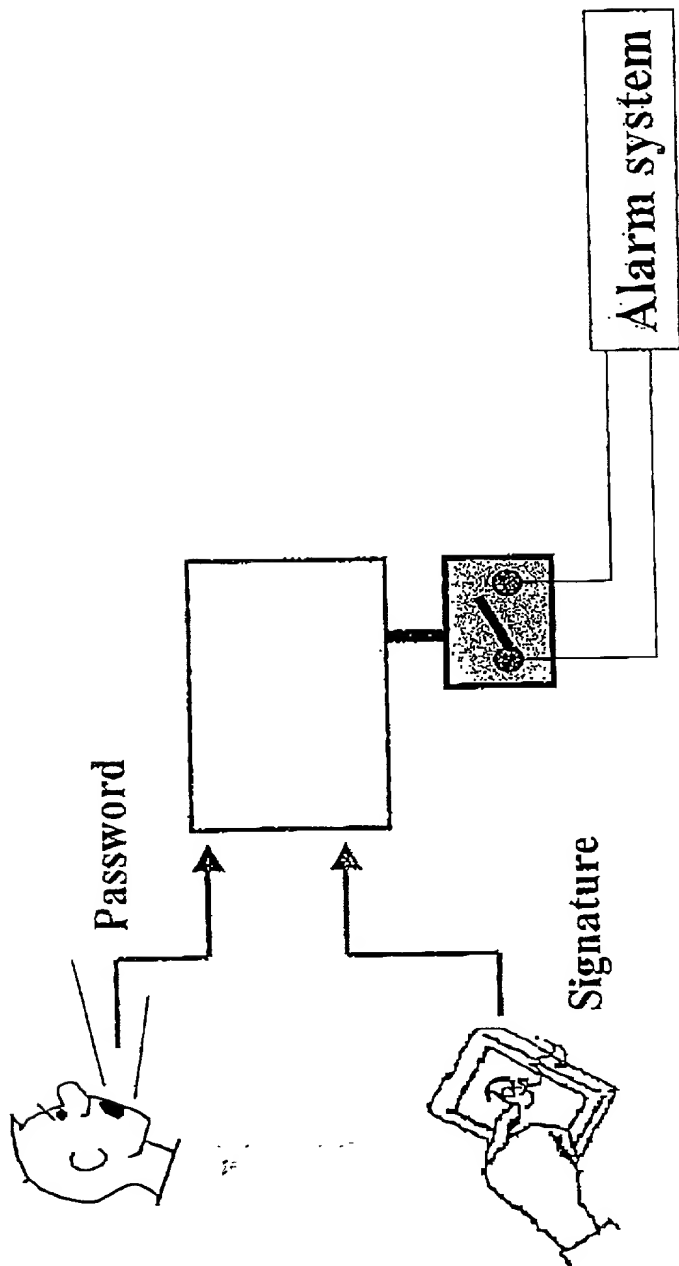


Fig. 3

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below under my name.

I believe that I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

HANDWRITTEN AND VOICE CONTROL OF VEHICLE COMPONENTS

the Specification of which

☐
☒

is attached hereto
was filed on May 6, 1999
as United States Application Number or PCT International
Application No. PCT/IL99/00238
and was amended on November 6, 2000 (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified Specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any provisional application filed in the United States in accordance with 35 U.S.C. §1.119(e), or any application for patent that has been converted to a Provisional Application within one (1) year of its filing date, or any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FILED APPLICATION(S)

<u>APPLICATION NUMBER</u>	<u>COUNTRY</u>	<u>(DAY/MONTH/YEAR FILED)</u>	<u>PRIORITY CLAIMED</u>
60/084,520	US	7-May-98	YES
PCT/IL99/00238	PCT	6-May-99	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in any prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred

Attorney Docket No.: P-1653-US

between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NO.	FILING DATE (DAY/MONTH/YEAR)	STATUS - PATENTED, PENDING, ABANDONED
60/084,520	7-May-98	EXPIRED
PCT/IL/00238	6-May-99	

I hereby appoint as my attorney(s) and agent(s) Heidi M. Brun (Agent, Registration No. 35,104), or Jerome R. Smith, Jr. (Attorney, Registration No. 35,684), or Daniel J. Swirsky (Agent, Registration No. 45,148) or Mark S. Cohen (Attorney, Registration No. 42,425) or Rochel L. Abboudi (Agent, Registration No. 44,490) or Suzanne Erez (Agent, Registration No. 46,688) said attorney(s) and agent(s) with full power of substitution and revocation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Please address all correspondence regarding this application to:

Heidi M. Brun
EITAN, PEARL, LATZER, & COHEN-ZEDEK
ONE CRYSTAL PARK, SUITE 210
2011 CRYSTAL DRIVE
ARLINGTON, VA 22202-3709

Direct all telephone calls to (703) 486-0600 and all facsimiles at (703) 486-0800.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR: ILAN, Gabriel

FULL RESIDENCE ADDRESS: 12 Eliyahu Hakim Street, Tel Aviv 69120, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR

DATE 17-January 2001

FULL NAME OF INVENTOR: GILOH, Benjamin Dev *IL4*

FULL RESIDENCE ADDRESS: Moshav Yaad, D.N. Misgav 20152, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR *[Signature]*

DATE 17/1/01

FULL NAME OF INVENTOR: KADOSH, Arie *ILX*

FULL RESIDENCE ADDRESS: 39/1 Remez Street, Naharia 22426, Israel

COUNTRY OF CITIZENSHIP: Israel

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR *[Signature]*

DATE 25/1/2001